


ELASTEC TDS118

## **Drum Skimmer**



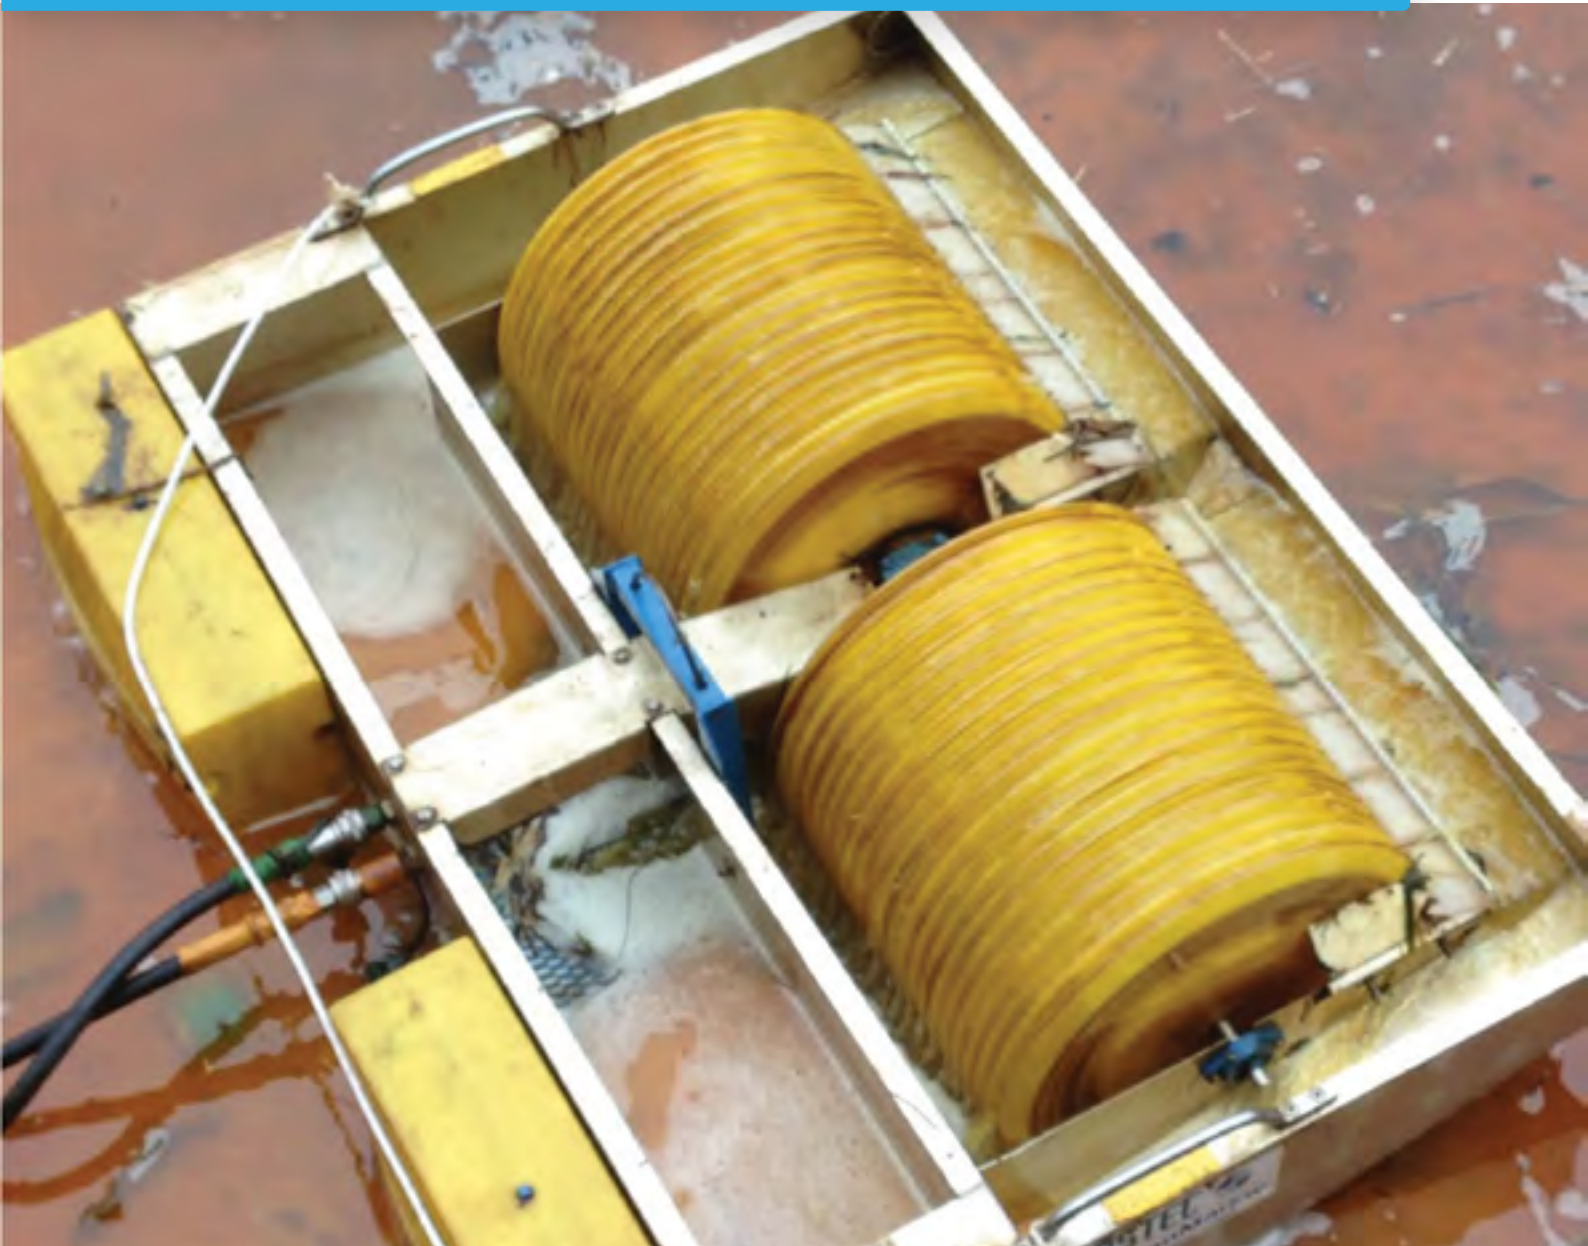

# **ELASTEC**

## **TDS118**

### **Drum Skimmer**

The TDS118 is one of the most popular oil skimmers we offer. The original design concept was patented in 1990. Thousands of Elastec drum skimmers have been sold worldwide and proven themselves both in emergency response but also industrial applications.

## **TD118 Drum Skimmer**

### **Industrial and Oil Response**

The fact that the skimmer is suitable for continuous duty is a testament to the design concept. It is suitable for oil spill response or industrial use. Due to its shallow draft and lightweight design (74 lbs / 33.5 kg), the TDS118 skimmer is ideal for cleanup in shallow waters such as creeks, rivers and lakes as well as harbors and near shore.

ELASTEC Drum Skimmers are able to recover a wide range of oils and sheen, from diesel to crude oils.

The TDS118 skimmer features heavy-duty high density Polyethylene drums, which are resistant to impact and abrasion. They not only serve as the rotating oleophilic element that selectively recovers the oil from water, they also provide buoyancy for the skimmer. The skimmer can draw oil in from all directions. The drum material is resistant to many in industrial pits, sumps, separators and tanks. The chemicals found in industrial pits, sumps, separators and tanks. The self-adjusting wiper blades recover oil from the face and side of the drums as they rotate. The wipers can easily be replaced without tools.



## TS118 Drum Skimmer

### Hydraulic or Pneumatic?

Drive is provided for the drums by a centrally mounted gearbox (provides even weight distribution), this gearbox provides the torque necessary to turn the drums in heavy oils as well as allowing for fine control of the drum speed. The drum shafts are supported by self-aligning bearings. This is all mounted in a lightweight anodized marine grade aluminum frame with open and steeply inclined pathways that direct recovered oil to the collection sump. The open design facilitates cleaning and removal of any debris or trash. A removable trash screen prevents larger items entering the recovered oil pump.



### TDS118 Fitted with Steam Coils



The TDS118 is capable of recovering both light and heavy oils with very low water content - typically around only 3%. It may be fitted with either an air or hydraulic drive motor. We offer a choice of pumps in different materials to suit the application.

The skimmer may be fitted with steam coils as an option to provide heat that warms the oil that's being recovered (to aid pumping and prevent freezing) as well as melting ice surrounding the skimmer.

The TDS118 is offered with either the original smooth drums or the latest patented Grooved Drums which can achieve higher oil recovery rates. The Grooved Drum design has been extensively tested by the Ohmsett test facility and researched by the University of California, Santa Barbara. This skimmer has also been independently tested by Environment Canada, CEDRE France, CRREL (Cold Regions Research and Engineering Laboratory). Test reports are available on request.

### Specifications

Smooth Drum Nameplate Capacity:	35 gpm / 8 cu.m per hour*
Grooved Drum Nameplate Capacity:	90 gpm / 20 cu.m per hour**
Number of Drums:	Number of Drums:
Frame:	Anodized marine grade aluminum***
Handles and Tether Points:	Included
Wiper Blades:	Self-adjusting (spring loaded) Spare wiper blades included
Wiper Retainer:	Mounted with stainless steel pins & springs
Dimensions:	52.5 x 40.5 x 18 inch / 1.33 x 1.02 x 0.46 m
Weight:	83 lb / 37.6 kg
Drive:	Pneumatic or Hydraulic
Max Operating Temp:	158°F / 70°C
Sump Coupling:	3 inch female camlock
Draft Light:	3 inch / 75 mm (may vary according to pump)
Lifting Point:	Certified Wire
Air requirements (for pneumatic models)	
Skimmer only:	5 - 15 cfm, 50 - 100 psi
Skimmer and E1 Diaphragm Pump:	10 - 35 cfm, 50 - 100 psi

Optional: Spares kit, disc and brush inserts, trough guard, steam coils.

\* Nameplate capacity verified by the US Coast Guard.


\*\* Tested at the Ohmsett test facility according to ASTM F2709

\*\*\* Stainless steel frame optional

### The TDS118 Oil Pumps

The TDS118 may be supplied with pneumatic or hydraulic motor with a choice of recovered oil pumps - air operated diaphragm or hydraulic driven submersible (E150). The optional diaphragm pump may be remotely positioned or mounted on the skimmer for high head applications.

Elastec pneumatic skimmers are fitted with air motors that conform to European standard EN13463-1 non-electrical equipment for explosive atmosphere group 11 cat 2 (gas & dust), protected by construction (surface temp. rated 135c).

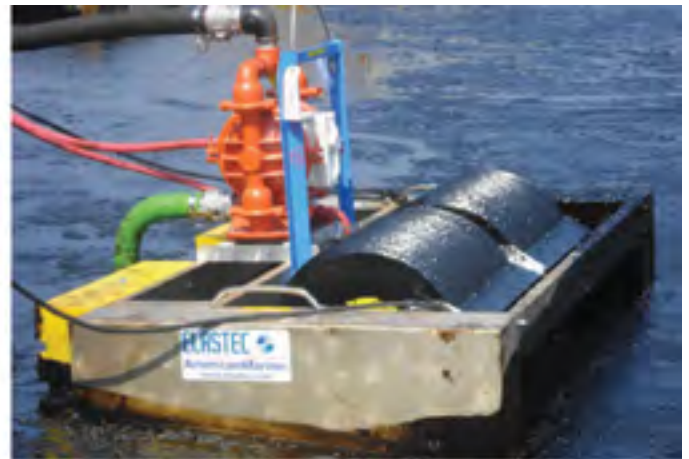

**Vacuum Truck Working with Skimmer**

The skimmer can be connected to a vacuum truck to suck out recovered oil. The drums may be driven by the compressed air provided by the trucks braking system.

Hydraulically operated skimmers may be delivered with a diesel or electric driven hydraulic power pack.



## Delivering Certainty

We're more than equipment suppliers. We're problem solvers.  
And that's unique in the Australian market.

We can provide complete solutions for spills, workshop services  
and products as well as workplace safety and hygiene.  
Everything you need. One point of contact

[www.spillpro.com.au](http://www.spillpro.com.au)

### OUR LOCATIONS

#### SYDNEY

38 Ricketty St  
Mascot  
NSW 2020

P: [02 8999 8491](tel:0289998491)

#### NEWCASTLE

4 Channel Rd  
Mayfield West  
NSW 2304

P: [02 4957 2886](tel:0249572886)

#### MELBOURNE

40 Latitude Blvd  
Thomastown  
VIC 3074

P: [03 9999 9277](tel:0399999277)

#### BRISBANE

20/388 Newman Rd  
Geebung  
QLD 4034

P: [07 3177 3096](tel:0731773096)

#### PERTH

67 Howe St  
Osborne Park  
WA 6017

P: [08 6555 4083](tel:0865554083)

#### ADELAIDE

8 Greenhill Rd  
Wayville  
SA 5034

P: [08 7070 1768](tel:0870701768)

#### DARWIN

Level 16, 19 Smith St  
Darwin  
NT 0800

P: [08 7999 7822](tel:0879997822)